

K-SERIES K100



RF PEAK POWER UP TO 10 MW

MODULATOR PEAK POWER UP TO 26 MW

This solid-state pulse modulator is designed to handle a wide range of different klystrons with a RF peak power from 3 MW to 10 MW. ScandiNova offers everything from a standard modulator to a turn-key RF system that includes all necessary system components from the wall socket to the accelerator, such as the klystron, diagnostics and low-level RF. Review our other pulse modulators in the modular K-Series.

SYSTEM SPECIFICATIONS	UNIT	DATA	NOTES
Klystron RF Peak Power	MW	3–10	Depends on choice of klystron
Klystron RF Average Power	kW	10	Maximum
Modulator Peak Power	MW	26	Maximum
Modulator Average Power	kW	30	Maximum
Pulse Voltage	kV	115–190	Typical range
Pulse Current	A	90–140	Typical range
Pulse Repetition Frequency Range	Hz	0–500	Typical range. Depending on max average power (see options).
Pulse Length, Top	µs	0.5–6	Typical range. Depending on max average power.
Flatness (Voltage)	%	+/-1	Flat top (see options)
Modulator Voltage Stability, RMS	%	0.02	(see options)
Cooling		Water	

INTERFACE	DEFAULT	OPTION
Mains Power, 3 Phase	400 VAC, 50/60 Hz	208/380/480 VAC
Mains Power, Single Phase	230 VAC, 50/60 Hz	115 VAC
Control Interface	ModBus TCP	
Water Cooling Interface In/Out	ISO G1"	
Trig Input	Electrical and Optical	
Diagnostics	Pulse Voltage and Current	See Options

Standard Modulator Includes

Control System (ScandiCat)
 Remote Control
 Local Control Panel
 Mains Power Distribution
 Cooling System
 Filament PS
 Klystron Socket
 Pulse Sensors
 Hard Wired Interlock System

Additional System Components

Low Level RF Amplifier/Generator
 Circulator & RF Loads
 Directional Coupler
 Waveguide Windows
 Vacuum PS
 Solenoid PS
 Klystron
 Extended cooling for Klystron,
 Solenoid etc.

Typical Klystron Loads

CPI	Thales	Toshiba
VKS8262 D	TH2157	E3772
VKS8262 E	TH2157 A	E3779
VKS8262 G	TH2157A-1	E3779A
VKS8262 J	TH2163 A	E3783
VKS8262 M	TH2165	E3787
VKS8262 S		L3
VKS8262 HS		L5822
		L6145



Options

Pulse/RF Diagnostics
 Enhanced PRF Range (up to 1000 Hz)
 Enhanced Stability (down to 0.004%)
 Enhanced Flatness (+/-0.1-0.5%)
 Neutron Resistant Switching

Size and Weight

Weight approx. 1000 kg
 (excl. oil, klystron, solenoid)

*Information contained in this document
 is subject to change without notice.*

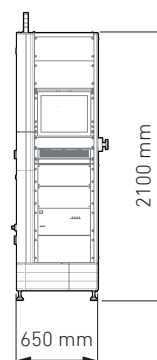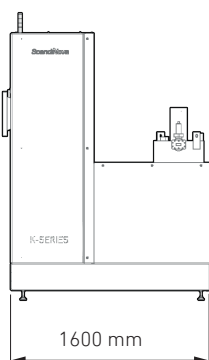

HEADQUARTERS

ScandiNova Systems AB
 Ultunaallén 2A
 SE-756 51 Uppsala, Sweden

CONTACT

Tel: +46 (0)18 480 59 00
 E-mail: info@scandinovasystems.com
 www.scandinovasystems.com