

# PG-SERIES PG050



## PULSE GENERATOR FOR PEF RESEARCH

PG050 is designed for research and testing of PEF technology. The Pulse generator provide electric pulses up to 6.2 MW peak power with unparalleled performance. Together with our PEF chamber prototype, it can easily be adapted to your specific needs regarding type of food, size and pulse specifications.

SYSTEM SPECIFICATIONS	UNIT	DATA	NOTES
Modulator Peak Power	MW	6.2	Maximum
Modulator Average Power	kW	8	Maximum
Pulse Voltage	kV	30–52	Typical range
Pulse Current	A	30–120	Typical range
Pulse Repetition Frequency Range	Hz	0–500	Typical range. Depending on max average power (see options).
Pulse Length, Top	µs	0.5–5	Typical range. Depending on max average power (see options).
Cooling		Water	

INTERFACE	DEFAULT	OPTION
Mains Power, 3 Phase	400 VAC, 50/60 Hz	208/380/480 VAC
Mains Power, Single Phase	230 VAC, 50/60 Hz	115 VAC
Control Interface	ModBus TCP	
Water Cooling Interface In/Out	Legris Push-in 12 mm	Swagelock 12 mm
Diagnostics	Pulse Voltage and Current	See Options

#### Standard Modulator Includes

Control System  
 Remote Control  
 Hard wired Interlock System  
 Internal Trig Generator


#### Options

Pulse Diagnostics  
 Pulse Sensors  
 Enhanced PRF Range, up to 1000 Hz  
 Extended Pulse Length, Top

#### Size and Weight

Weight approx. 140 kg  
 (incl. oil)

*Information contained in this document  
 is subject to change without notice.*

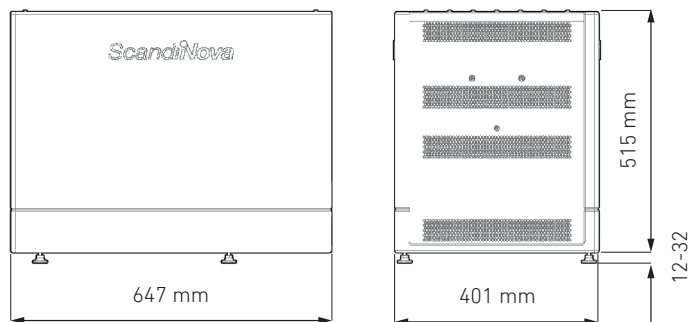

#### HEADQUARTERS

ScandiNova Systems AB  
 Ultunaallén 2A  
 SE-756 51 Uppsala, Sweden

#### CONTACT

Tel: +46 (0)18 480 59 00  
 E-mail: info@scandinovasystems.com  
 www.scandinovasystems.com