

# PG-SERIES **PG200**



## AVERAGE POWER UP TO 80 KW AND PEAK POWER UP TO 36 MW

PG200 is designed to provide electrical pulses up to 36 MW with unparalleled performance. It's easy to integrate and equipped with ScandiNova's modern and user friendly control system – ScandiCat. The products within the PG-SERIES have a very resistant casing to withstand demanding industrial applications, which make them a perfect choice for e.g. Pulsed Electric Field generation in food processing and are perfectly suited for research needs where mid-range pulse generators are needed.

SYSTEM SPECIFICATIONS	UNIT	DATA	NOTES
Modulator Peak Power	MW	36	Maximum
Modulator Average Power	kW	80	Maximum
Pulse Voltage	kV	50	Maximum
Pulse Current	A	1200	Maximum
Pulse Repetition Frequency Range	Hz	1000	Maximum
Pulse Length, Top	µs	20	Maximum
Cooling		Water and air	

INTERFACE	DEFAULT	OPTION
Mains Power, 3 Phase	400 VAC, 50/60 Hz	208/380/480 VAC
Mains Power, Single Phase	230 VAC, 50/60 Hz	115 VAC
Control Interface	ModBus TCP	
Water Cooling Interface In/Out	ISO8434-1, 24° cone connectors. Ø ½" Hose	
Diagnostics	Pulse Voltage and Current	
HV connector	CA1	

#### Standard Modulator Includes

Control System (ScandiCat)  
Remote Control  
Hard wired Interlock System  
Internal Trig Generator

#### Additional System Components

Local Control Panel


#### Options

Pulse Diagnostic  
Pulse Sensors  
Enhanced PRF Range, up to 1000 Hz  
Extended Pulse Length, Top

#### Size and Weight

Weight approx. 1000 kg (excl. oil)

*Information contained in this document  
is subject to change without notice.*

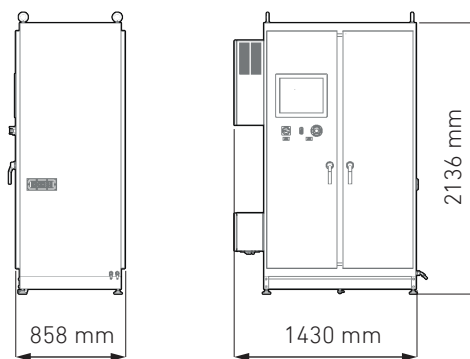

#### HEADQUARTERS

ScandiNova Systems AB  
Typsnittsgatan 15  
SE-754 54 Uppsala, Sweden

#### CONTACT

Tel: +46 (0)18 480 59 00  
E-mail: info@scandinovasystems.com  
www.scandinovasystems.com