

M-SERIES M110



MAGNETRON MODULATOR

ScandiNova's M110 is a compact pulse Modulator designed for system integration. The Modulator is optimized for a wide range of different magnetrons with an RF peak power ranging from 1.0 MW to 3.1 MW. To facilitate system integration, the Modulator has a split design with a Tank Unit and a Pulse Unit, and can be placed in a very compact enclosure. The M110 is equipped with active power factor correction.

All interlocks and essential diagnostics are fully integrated, and ScandiNova's modern control system offers both a user-friendly interface and a capability for pulse shape modification. The pulse length, amplitude and repetition rate can all be changed.

The M110 can be delivered as a pure high-power pulse modulator or as part of an RF Unit including magnetron and related components. Different levels of service and support programmes are available.

COMPACT

UP TO 3.1 MW RF PEAK POWER

MULTIPLE DIAGNOSTIC FEATURES

POWER FACTOR > 0.95

MINIMIZED CONSUMABLES

THE M-SERIES

ScandiNova's M-series contains a range of magnetron pulse modulators with high reliability and performance, a compact design and low energy consumption.

Our magnetron pulse modulators require about one third of the space of alternative solutions yet still offer around 30% higher efficiency, two operating advantages that especially appeal to cancer treatment providers.



Their high reliability and performance also attract many industry applications.

SPECIFICATIONS	UNIT	VALUE	NOTES
Magnetron RF peak power	MW	1-3.1	Depends on choice of magnetron
Magnetron RF average power	kW	4.0	Maximum, depends on choice of magnetron
Modulator peak power	MW	6.2	Maximum
Modulator average power	kW	8	Maximum
Pulse voltage	kV	30-52	
Pulse current	A	30-120	
RF pulse length, top	µs	0.5-5	Depends on max average power
Pulse repetition rate	Hz	0-500	Depends on max average power
Power factor	-	> 0.95	
Water cooling	l/min	8	18-40 °C, non-condensing

INTERFACE	CONNECTOR	SPECIFICATIONS	NOTES
Mains power, three-phase	Terminal block (4-wire)	380-480±10 % VAC, 50/60 Hz	
Mains power, single-phase	C20	115-230±10 % VAC, 50/60 Hz	
Control interface	RJ45	Modbus TCP	
Water cooling interface	Legris Push-in 12 mm		Other connector options available
Trig input	BNC	Electrical	
Diagnostics	BNC	Pulse voltage & current signals	

SIZE AND WEIGHT	UNIT	VALUE
Weight, Pulse Unit	kg	36
Weight, Tank Unit	kg	62

For more information, visit www.scandinovasystems.com/M110

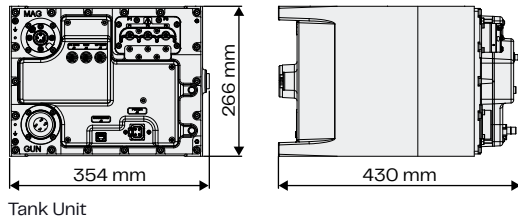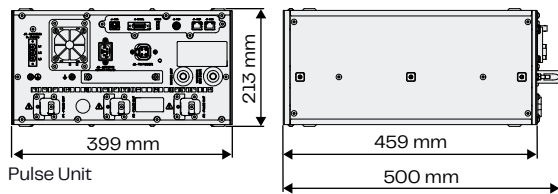

The Standard Modulator Includes

- Filament power supply
- Control system
- Control via Modbus TCP
- Pulse sensors
- Cable kit between Pulse Unit and Tank Unit
- HV pulse cable
- Internal trig generator
- Factory acceptance test certificate
- Manuals

Additional System Components

- Circulator & RF loads
- Directional coupler
- Waveguide windows
- Magnetron
- Peaking components

Services

- Training in handling, operation and maintenance
- Shipping
- Installation and start-up
- Service contract

Typical Magnetron Loads

BVERI	GLVAC
VE2110	VE2110A
	VE2098
Nisshinbo	
M1603	GLM
M1466	GLM5193
MX7640	GLM5810
M1466N	GLM6090
M1466T	
E2V	VMC3109
MG5193	VMC3136
MG6090	
MG6493	
MG7095	

Contact ScandiNova for any requirements not covered by this specification.

Information contained in this document is subject to change without notice.

COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV
ISO 9001 • ISO 14001

HEADQUARTERS

ScandiNova Systems AB
Typsnittsgatan 15
SE-754 54 Uppsala, Sweden

CONTACT

Tel: +46 (0)18 480 59 00
E-mail: info@scandinovasystems.com
www.scandinovasystems.com

ScandiNova
Excellence in pulsed power