

# PG-SERIES PG050



## PULSE GENERATOR FOR PEF RESEARCH

PG050 is designed for research and testing of PEF technology. The Pulse generator provides electric pulses up to 6.2 MW peak power with unparalleled performance. Together with our PEF chamber prototype, it can easily be adapted to your specific needs regarding type of food, size and pulse specifications.

SYSTEM SPECIFICATIONS	UNIT	DATA	NOTES
Modulator Peak Power	MW	6.2	Maximum
Modulator Average Power	kW	8	Maximum
Pulse Voltage	kV	52	Maximum
Pulse Current	A	120	Maximum
Pulse Repetition Frequency Range	Hz	500	Maximum
Pulse Length, Top	µs	5	Maximum
Cooling		Water	

INTERFACE	DEFAULT	OPTION
Mains Power, 3 Phase	400 VAC, 50/60 Hz	208/380/480 VAC
Mains Power, Single Phase	230 VAC, 50/60 Hz	115 VAC
Control Interface	ModBus TCP	
Water Cooling Interface In/Out	Legris Push-in 12 mm	Swagelock 12 mm
Diagnostics	Pulse Voltage and Current	See Options
HV Connector	CA11	

#### Standard Modulator Includes

- Control System
- Remote Control
- Hard wired Interlock System
- Internal Trig Generator


#### Options

- Pulse Diagnostics
- Pulse Sensors
- Enhanced PRF Range, up to 1000 Hz
- Extended Pulse Length, Top

#### Size and Weight

Weight approx. 140 kg  
(incl. oil)

*Information contained in this document  
is subject to change without notice.*

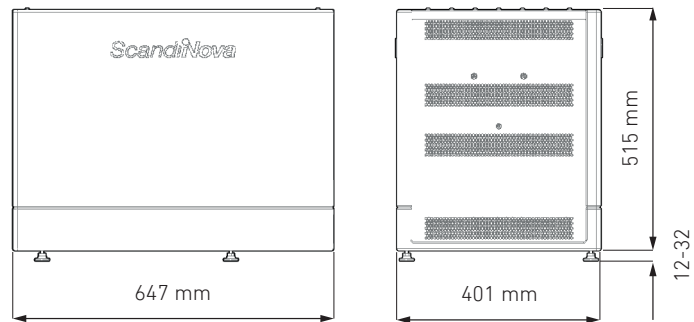

#### HEADQUARTERS

ScandiNova Systems AB  
Typsnittsgatan 15  
SE-754 54 Uppsala, Sweden

#### CONTACT

Tel: +46 (0)18 480 59 00  
E-mail: info@scandinovasystems.com  
www.scandinovasystems.com